

## technical data type **BUBA**

**Body:** standard; injected white polycarbonate.  
 - **Upon request** : transparent or transparent blue.

**Diffuser** : standard; injected opal PMMA or opal polycarbonate.



**Impact strenght data of the diffusor :**

- Diffuser in PC : > 6Nm (IK08).
- Diffuser in PMMA : > 0.7Nm (IK05).

**Reflector** : glossy galvanised metal plate.

**Electrical specifications :**

- HF or ferromagnetic ballasts (depending on lamp type).
- **Optional** : - Emergency module.  
 (1x28W TC-DD, 1x18W TC-L).
- Motion detector.(Buba large only).  
 (1x22W T5R, 1x18W TC-L).

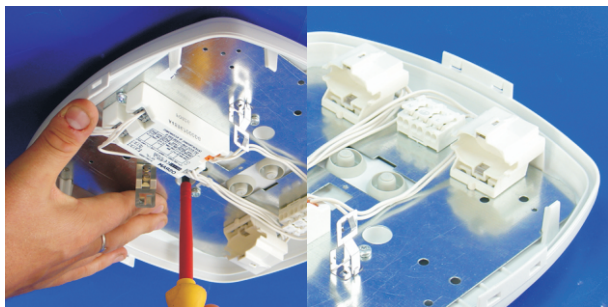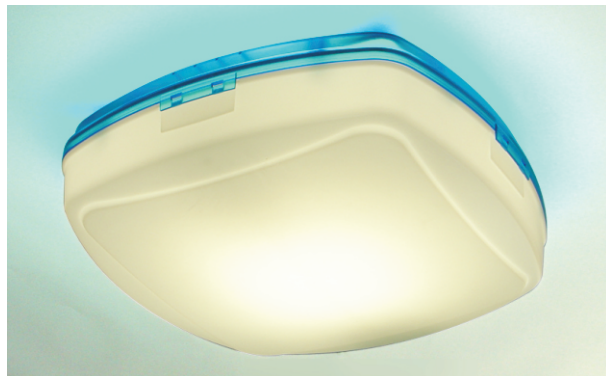

Easy installation

Electrical connection


**Lamps:**

- 1x TC-DD 16W / 28W / 38W
- 1or 2 xTCS 7W / 9W / 11W.
- 2 xTCS 11W.
- 1or 2 xTC-L 18W.
- 1x T5R 22W.



Diffuser is clicked on the base

Easy opening of the diffuser




Transparent or transparent blue bases (Optional)



High frequency motion detector. (Optional)




16.01.2012










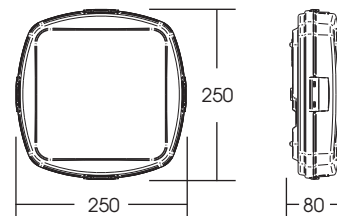
The liabilities are bound to the published informations, which might be modified without notice.


















## technical data type **BUBA**



Buba Small		L	Reflector pos.	Ballast ferro.	Ballast EL
1x 7/9 W	TC-S(el)	250	Low	G23 	2G7 
1x16 W	TC-DD	250	Low	-	GR10q 
1x18 W	TC-D(el)	250	Low	G24d-2 	G24q-2 
2x 7/9 W**	TC-S(el)	250	Low	G23 	2G7 

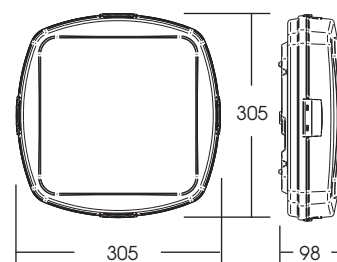


Buba Large		L	Reflector pos.	Ballast ferro.	Ballast EL
1x18 W	TC-L	305	Low	2G11 	2G11 
1x22 W	TR5	305	Low	-	2GX13 
1x26W	TC-D(el)	305	Low	G24d-3 	G24q-3 
1x28 W	TC-DD	305	High	GR8 	GR10q 
1x38 W*	TC-DD	305	High	-	GR10q 
2x11 W	TC-Sel	305	Low	-	2G7 
2x18 W	TC-L	305	High	-	2G11 



Buba Large Emergency		L	Reflector pos.	Batteries	Ballast EL.
1x28 W*	TC-DD	305	High	3h.	GR10q 
1x18 W*	TC-L	305	High	3h.	2G11 

Buba Large Motion detector		L	Reflector pos.	Ballast EL.
1x22 W	TR5	305	High	2GX13 
1x18 W	TC-L	305	High	2G11 

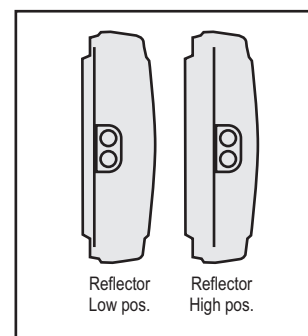

All dimensions are in mm.  
\*: Ta max. is 25°C.