

## technical data type **BUBA**

**Body:** Injected white polycarbonate.

- Without bracket, see BUBA+ for optional bracket.

**Diffuser :** Injected frosted polycarbonate.

**Impact strenght data of the diffusor :**


- Diffuser in PC : > 6Nm (IK08).

**Electrical specifications :**

- Lamp type : LED

- **Optional** : - Emergency module. (not for type HO)

- Motion detector. (ultrasonic)

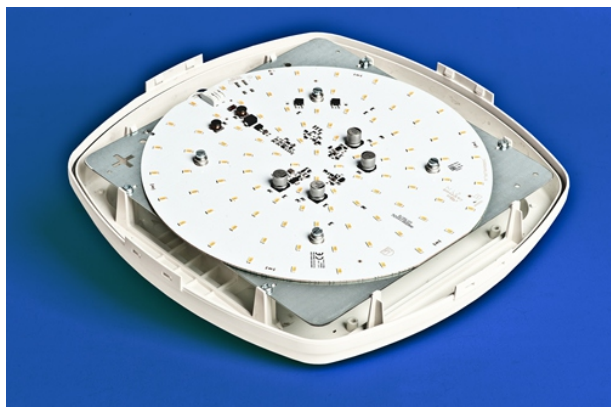

**Type Multi:** 8,5W till 13,5W with DIP-switch  
( 4 output levels ).

**Type MID:** 15W with 1860 lm.

**Type HO:** 19W with 2270 lm

Cri > 80 for colors 3000 K and 4000 K  
Cri > 90 for colors 2700 K (on request)

Lifetime : 50.000 h L80 B50.



Diffuser is clicked on the  
base


Easy opening of the  
diffuser



High frequency  
motion detector.  
(Optional)




12.02.2020



The liabilities are bound to the  
published informations, which might  
be modified without notice.



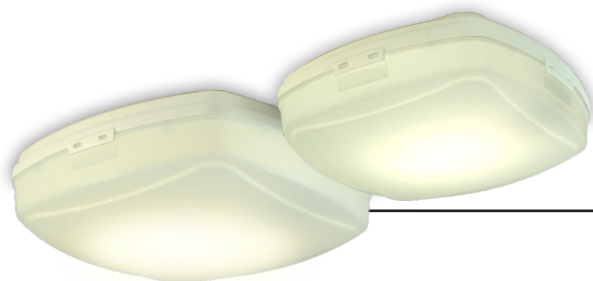


## technical data type **BUBA**

Type Multi		
8,5W	1120 lm	45°C
9,5W	1220 lm	45°C
13,0W	1550 lm	40°C
13,5W	1660 lm	40°C
Emergency	4 levels	25°C

Type MID		
15,0W	1860 lm	35°C
Emergency	1860 lm	25°C

Type HO		
19,0W	2270 lm	35°C
No Emergency		



All dimensions are in mm.