




technical data type **DCH-R 170** **DCH-R 210** **DCH-R 245**

Body: made of zinc-coated sheet. The outer-ring is made of cast aluminium finished with white powder coating. The springs are made of a hardened zinc-coated steel tape.

Optic: Faceted reflector of high-polished aluminium coated by vapour deposition.
- **optional:** - Frosted or transparent glass, providing a IP44 protection.

Electrical specifications:

- ferromagnetic ballast and switch starters.
- **optional:** - HF-ballast.

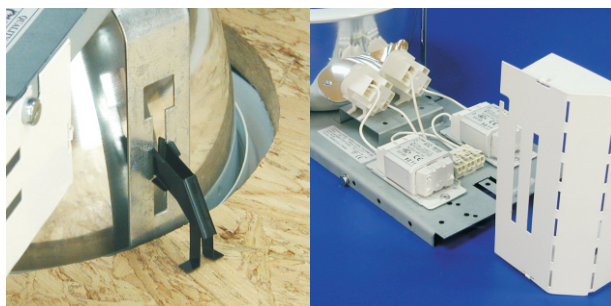


Easy mounting springs

Protection cover



Adjustable rear support

Easy removable glass (option)

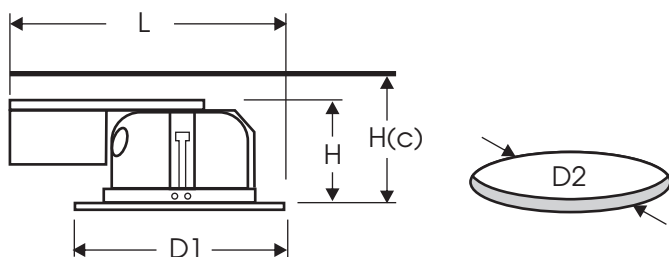


Model	L	H	H(c)	D1	D2
DCH-R 170	355	120	170	192	170
DCH-R 210	380	130	180	230	210
DCH-R 245	395	180	230	258	245

All dimensions are in mm.

	DCH-R 170	DCH-R 210	DCH-R 245
1x13W	✓		
1x18W	✓		
1x26W		✓	
1x32W			✓
1x42W			✓
2x13W	✓		
2x18W	✓		
2x26W		✓	
2x32W			✓
2x42W			✓



V09.12.2013



*The dimensions shown on this document can be modified without notice.