



## technical data type **ELX** **Ecoline**

**Housing:** Frosted PC material.

Always with stainless steel suspension brackets.

**Quick connectors:** IP65 Stucchi  
IP66 Adels and Wieland

### Specifications:

- Product life min. 50.000h L80 B10 at 25°C  
or 35.000h L70 B10 (Ta.max.)

- Available in 3000K, 4000K, 6500K  
with CRI of min.80

- MacAdam 3 SDCM

- Luminous efficiency: LER frosted diff.  
up to \*\* 131 lm/W.

- 220-240V 50/60 Hz.

- Ta: -15°C/+45°C

- **Optional :** - 1-10V and DALI.  
- Trough-wiring 1 phase or 3 phase.  
(This will influence the Ta.max.)  
- Version for CBS (DC).







Model	Art.	Length	Power*	Flux**	Ta.max.
<b>600</b>	Z	620 mm	12 W	1500 lm	45°C
	Z		21 W	2560 lm	35°C
<b>1200</b>	Q	1190 mm	28 W	3780 lm	45°C
	O		39 W	5130 lm	35°C
<b>1500</b>	W	1490 mm	35 W	4575 lm	45°C
	P		49 W	6420 lm	35°C

\* Total power consumption of LED's and driver.

\*\* Luminous flux of fitting @ 25°C for 840. (correction factor 0.95 for 830)

Luminous output and electrical load have an initial tolerance of +/- 10 % from nominal.






10/11/2020



---

## technical data type **ELX** **Ecoline**

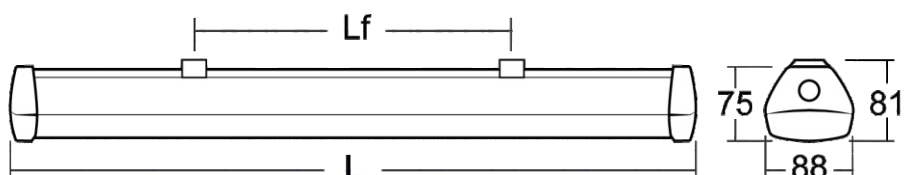

VLUX  
Industrieweg Roosveld  
3400 LANDEN BELGIUM

Tel. + 32 11 88 09 00  
Fax + 32 11 88 09 80

website [www.vlux.com](http://www.vlux.com)  
**ISO 9001** certified company.

