



technical data type FUTURIX-PC

Base: Injected polycarbonate. Grey colour.
Standard suspension brackets.

- Optional :**
- Transparent.
 - Transparent yellow (honey).
 - Transparent blue (lagoon).
 - Transparent green (mint).
 - Transparent red (rio).


Diffuser: an injected lined diffuser in polycarbonate or BC7.

Reflector: white painted metal gear tray, hingeable on the reflector retaining clip for maintenance.
Special perforated gear tray for transparent 2-lamp versions.

Clips: 1-part polycarbonate clips, stainless steel clips or 1-part polyamide clips (hingeable).

Electrical specifications:

- ferromagnetic ballast and switch or electronic starters (only available with grey coloured base).
- Electronic ballast.
- optional:
 - HFD ballast
 - throughwiring in housing.
 - Emergency module.

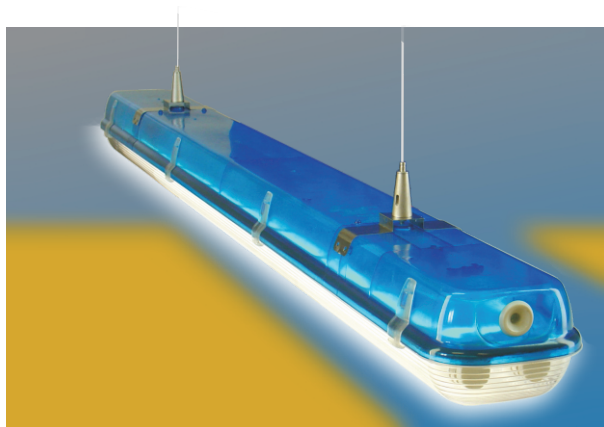


Lamps:

- fluorescent T8 lamps in 36w - 58w
- T5 in 28w - 35w - 49w - 54w - 80w available.



Injected polycarbonate base (grey)




Stainless steel suspension bracket



Transparent yellow base (optional)



Transparent blue base (optional)

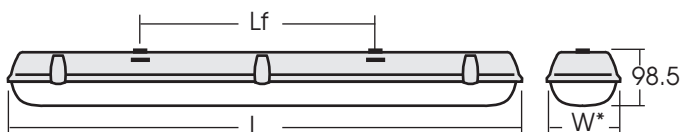


Model T8	Model T5	L	W	Lf
1x 36W	1x28W	1275	84	800
1x 58W	1x35/49W	1575	84	1100
2x 36W	1x54W / 2x28W	1275	134	800
2x 58W	1x80W / 2x35/49W	1575	134	1100

*Dimensions without clips



Transparent green base (optional)



Transparent red base (optional)

