



## technical data type **FUTURIX VINO**

*Futurix with LED tube especially for wine, champagne and beer cellars.*

*The Light is free of blue „High Visible Energy“ spectrum (400nm - 490nm).*

**Base:** Glass reinforced polyester, compression moulded (GRP).

- **Optional** : - Stainless steel suspension bracket.  
- Wieland, Stucchi or Adels connector.

**Diffuser:** Clear Polycarbonate

**Impact strength data of the diffuser:**

diffuser in PC > 6 Nm (IK08)

**Lamp:** Toyoda LED UGS-500-CR

**Clips:** 1-part stainless steel clips

- **Optional** : 1-part polycarbonate clips  
or 1-part PA clips.



### Specifications:


- Color 2150 K
- Product life min. 60.000h L80 B10 at Ta.max.
- MacAdam 3 SDCM
- 220-240V 50/60 Hz.
- Ta: -20°C/Ta.max.

- **Optional** : - Through-wiring 1 phase or 3 phase.  
(This will influence the Ta.max.)

Housing	Power*	Flux**	Ta.max.
118 (frosted)	13 W	1190 lm	30 °C
136 (frosted)	25 W	2380 lm	30 °C
218 (frosted)	26 W	2380 lm	30 °C

\* Total power consumption of LED tube and driver.


Luminous output and electrical load have an initial tolerance of  
+/- 10 % from nominal.

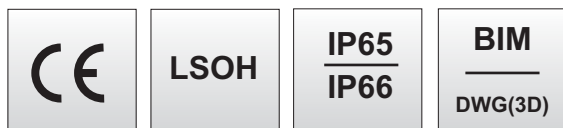

28/11/2018



## technical data type FUTURIX VINO

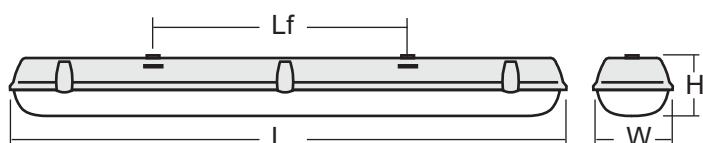

Housing	L	W*	H	Lf	Clips	Kg
118	665	84	98,5	400	6	1,5
136	1275	84	98,5	800	8	1,8
218	665	134	98,5	400	6	2,0

\*Dimensions without clips

