




technical data type INW

Housing and diffuser:

- Housing: made of white powder coated steel, developed for module 600 ceilings.
- option: side mounting brackets
- option: longitudinal mounting brackets

Types of louvres:

- single parabolic: longitudinal reflector / crossblade
- MAT/MAT : matt / matt



Side mounting bracket
(optional)


Electrical specifications:

- ferromagnetic ballast and switch starters
- optional:
 - parallel compensation
 - electronic starters
 - low loss ballast
 - HF-ballast and HFD-ballast

Lamps: - fluorescent lamps in 18 - 36 - 58w




Panel ceiling Mod. 100/200

Model	L	W1	H1	Kg	m3
1x 36W	1197	184	93	2.9	0.022
1x 58W	1497	184	93	3.9	0.027



T rails ceiling Mod. 300/600

Model	Module	L	W	H	Kg	m3
1x 36W	-	1197	184	93	2.9	0.022
1x 58W	-	1497	184	93	3.9	0.027
2x 18W	300 x 600	597	297	93	2.5	0.020
2x 36W	300 x 1200	1197	297	93	4.9	0.040
2x 58W	300 x 1500	1497	297	93	6.3	0.050
3x 18W	600 x 600	597	597	93	4.9	0.040
4x 18W	600 x 600	597	597	93	4.9	0.040
4x 36W	600 x 1200	1197	597	93	9.5	0.080

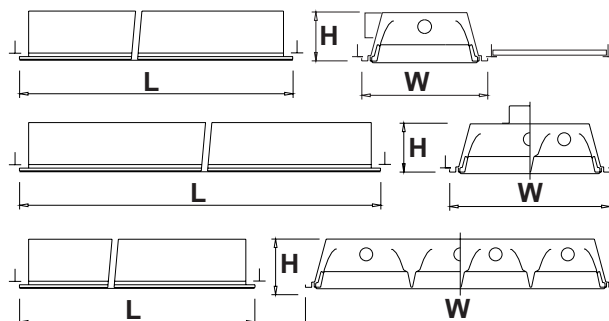

*The dimensions shown on this document can be modified without notice.



