



technical data type **LILI-EM**

Housing:

- White powder coated steel.
- White coloured polycarbonate injected endcaps.

Diffuser:

The plastic diffuser is snap-in mounted on the metal backplate and is easy removable without any tool.

- Extruded profile in frosted PMMA.
- Extruded profile in opal polycarbonate.

Electrical specifications:

- ferromagnetic ballast and switch starters.
- emergency applications in 3H
- test-buttons for emergency function test.
- non maintained or maintained version.
- **optional:**
 - HF ballast.
 - Standard (no emergency) 1&2 x 8W.




Lamps: Fluorescent lamps in 8W.




Lili EM
1x8W Emergency

Lili
2x8W Standard

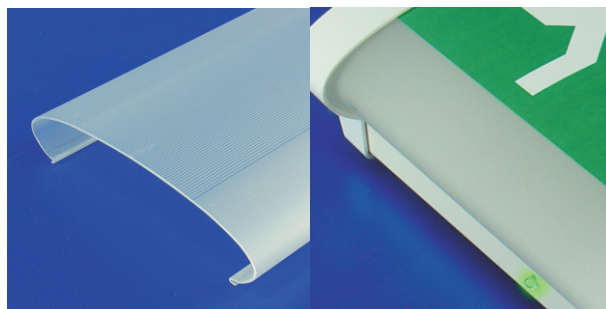



"Frosted" PMMA diffuser

Green led signal



LILI-EM	Batt.	Autonomy
T5 1x8W	3x4Ah	3h.

LILI	
T5 1x8W	
T5 2x8W	



V17.01.2012

