

technical data type LILI


LILI, the LI near LIghting:

- The fitting consists of a white metal back plate, a plastic extruded clear or opal diffuser and standard white or black coloured plastic injected endcaps.
- The cover guarantees an efficient direct/indirect light.
- The plastic diffuser is snap-in mounted on the metal backplate and is easy removable without any tool.
Available in : -PMMA (clear, opal or frost)
-UV stabilised Polystyrene (clear, opal)
-Polycarbonate (light opal)
- **Optional** : - Adjustable cable suspension (upto 2 m).
- Endcap + midcap in PC.



Electrical specifications:

- ferromagnetic ballast and switch starters.
- low loss ballast
- Individual or "in-line" luminaires (max 16A).
- **Optional** :- parallel compensation
 - electronic starters
 - HF-ballast in 36 and 58w

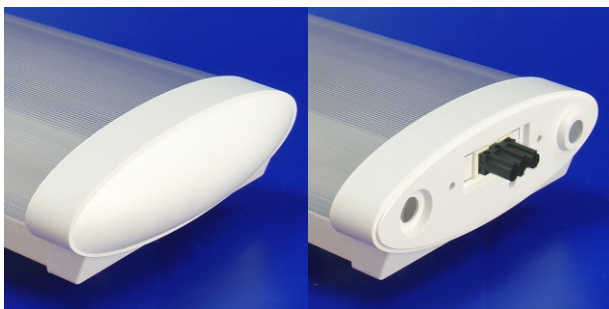


Endcap
(PS high impact)

"Midcap" for in-line
assembly (PS high impact)

Lamps:

- fluorescent T8 lamps : 18 - 36 - 58w
- fluorescent T5 lamps : 8-21-28-35-39-49-54w

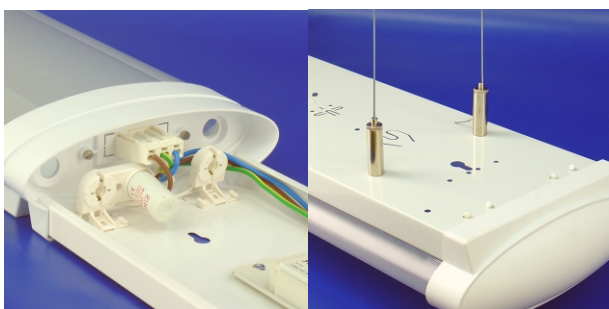


Throughwiring
(in-line installation)

Adjustable cable
suspension (option)



High quality prismatic diffuser
(PMMA - Bc7 - PC)


Easy access
(no tools necessary)




V04.03.2019




technical data type LILI

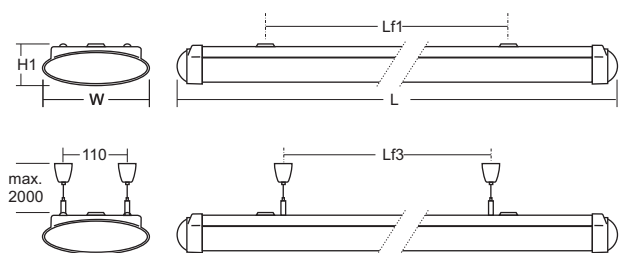

LiLi Suspension set




LiLi Connection set



Lili T8	L	W	H1	Lf1	Lf3	Kg
2x 18W	683	208	77	460	370	2.0
2x 36W	1293	208	77	800	710	3.8
2x 58W	1593	208	77	1000	910	5.4
Lili T5	L	W	H1	Lf1	Lf3	Kg
1x 35/49W	1550	208	77	1000	910	4.5
2x 21/39W	950	208	77	570	480	1.8
2x 28/54W	1250	208	77	800	710	3.0
2x 35/49W	1550	208	77	1000	910	4.5
2x8W	420	208	77	-	-	1.1
Lili-EM (emergency)	L	W	H1	Battery	Autonomy	Kg
1x8W	420	208	77	3x4Ah	3h	1.8






LiLi



LiLi Mid-End



LiLi Mid-Mid

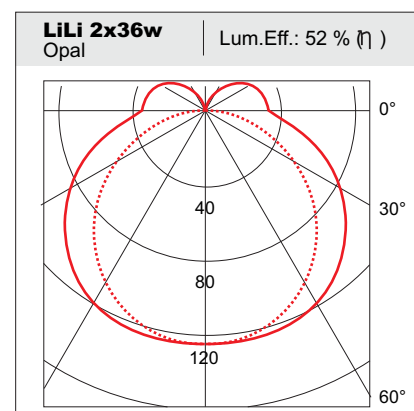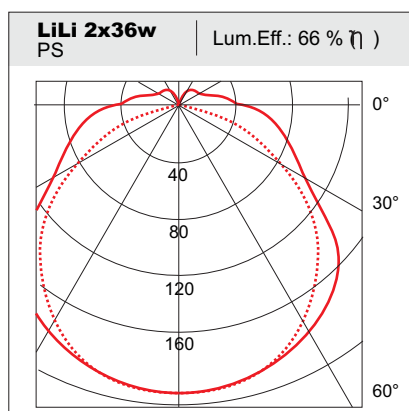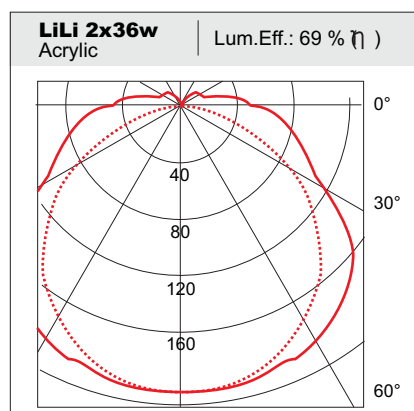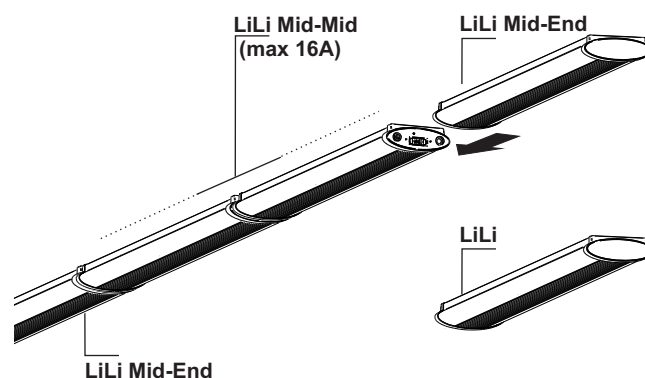

VLUX

Industrieweg Roosveld
3400 LANDEN BELGIUM

Tel + 32 11 88 09 00
Fax + 32 11 83 22 22

website www.vlux.com
ISO 9001 certified company

