

technical data type **Seagull**

Housing and reflector:

- The fitting consists of white powder coated reflectors, and endcaps, fixed on a geartray.
- A semi cylindrical diffuser of perforated white powder coated steel holding an opal sheet on the inside.
- The cover guarantees an efficient direct/indirect light.


Electrical specifications:

- ferromagnetic ballast and switch starters
- optional:
 - serial or parallel compensation
 - electronic starters
 - low loss ballast
 - HF ballast.




Lamps:

- T8 fluorescent lamps in 18 - 36 - 58w
- T5 fluorescent lamps in 28 - 35 - 49 - 54w

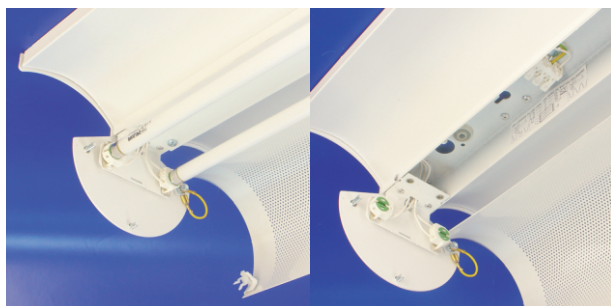


Easy opening of the diffuser

All components fixed on geartray





Perforated diffuser

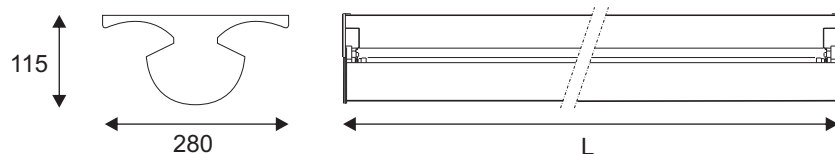

Model T8	L	W	H
1x 18W	627	280	115
1x 36W	1237	280	115
1x 58W	1537	280	115
2x 18W	627	280	115
2x 36W	1237	280	115
2x 58W	1537	280	115

Model T5	L	W	H
2x 28W	1200	280	115
2x 54W	1200	280	115
2x 35W	1500	280	115
2x 49W	1500	280	115



V09.12.2013

*The dimensions shown on this document can be modified without notice.



technical data type Seagull

